




## PORTA P/160

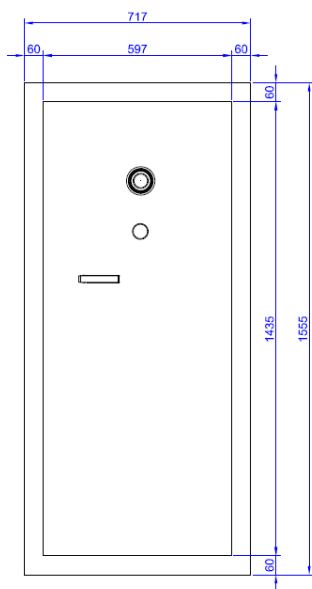

- Armored door for small safety rooms
- External frame dimensions cm. H.155,5 L.71,7 P.8
- Door step dimensions porta cm. H.138,5 L.49
- Weight Kg. 89
- Structure mm.3 thick
- Internal hinges opening to 140°
- Locking system with 3-expansions rack controlled by a friction which activates 4 horizontal bolts, 1 lower and 1 upper  $\varnothing$ . 22. mm
- Locking system operated by handle and re-locked by a double-bitted safety lock (certified EN 1300 class "A") and eventual mechanical or electronic combination
- Locks protected by a manganese steel plate
- Handle projection mm. 50
- Frame in boxed steel sheet, thickness mm.3 with U-profile that must be filled with cement for installation, in order to have an anchoring system on the entire perimeter of the door
- Color grey grigio RAL 7032 in peeled finish

ART. CODE	LOCKING SYSTEM
P/160	Double bit lock
PC/160	Double bit lock and rack with three expansions
PC/160/E	Double bit lock and electronic combination
PC/160/MH	Double bit lock and a self-powered Mas Hamilton electronic combination